

"YACHT"



■ BILGE PUMPS

The bilge pumps of the series "YACHT" are entirely manufactured in special crash, rust and hydrocarbons proof polypropylene.

Very easy to be cleaned and installed, this pump is supplied with 1 meter cable, fastening bottom cover and instruction manual for correct use.

TECHNICAL FEATURES

- Pump body and impeller: Techno-polymer
- Pump shaft & screws: stainless steel Aisi 316
- Seal: NBR lip seal

MOTOR


DC motor 12V or 24, not suitable for continuous duty.

Sealand Electric Pumps South Africa


44 Agaat Str, Nirvana Industrial, Polokwane, Limpopo Province, South Africa, 0699

 +27 87 150 2772  +27 86 647 3047  info@sealand.co.za  www.sealand.co.za

min⁻¹ ~ 2900

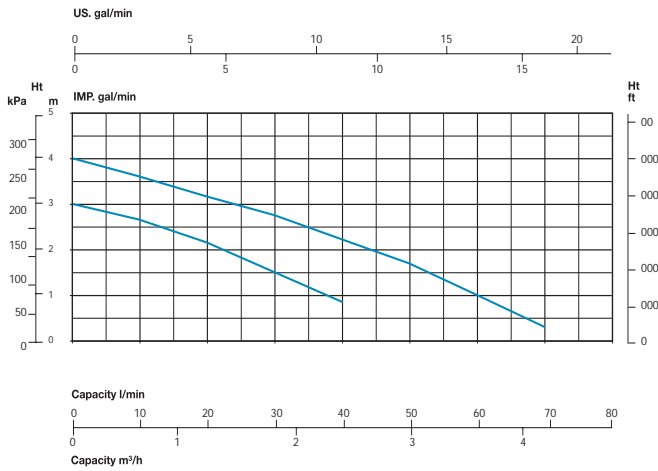

TYPE	Volt	Input power	RPM	Input current [A]	Capacity															
					Q [m³/h]	Q [l/1']	Total head (m W.C.)													
	[V]	[W]	[min-1]		0	0.6	1.2	1.8	2.4	3	3.6	4.2								
					0	10	20	30	40	50	60	70								
YACHT 12	12	65	4200	4.2									3	2.65	2.15	1.5	0.85			
YACHT 24	24	65	4200	2.6									3	2.65	2.15	1.5	0.85			
YACHT MAXI 12	12	100	4200	6									4	3.6	3.1	2.75	2.1	1.8	1	0.3
YACHT MAXI 24	24	100	4200	3.5									4	3.6	3.1	2.75	2.1	1.8	1	0.3

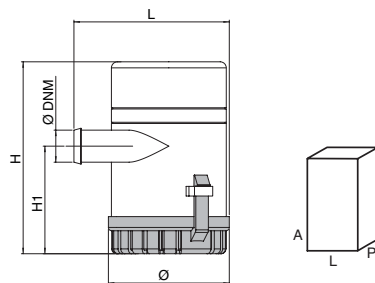

TYPE	DIMENSIONS [mm]				PACKING [mm]			PESO WEIGHT [kg]
	F	H	H2	DNM	A	L	P	
YACHT 12V. 65W.	99	160	27	30	180	110	110	0.93
YACHT 24V. 65W.	99	160	27	30	180	110	110	0.93
YACHT MAXI 12 V. 100W.	99	195	27	30	240	110	110	1.83
YACHT MAXI 24V. 100W.	99	195	27	30	240	110	110	1.83